

**QUICK CHANGE TWEEZERS** - 1600-AL / 1600-AL-STD / 1700-AL series  
Aluminum Serrated Handle



1604-AL



1704-AL




1604-AL-STD

1600-AL series with Black ESD Safe Tip  
1600-AL-STD series with Grey Static Dissipative Tip  
1700-AL series with White DELRIN 500 Tip

• Available with Inside Serrated Tip, add suffix "D" (example 1602D-AL)


**1602-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1602-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1702-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Medium Tip

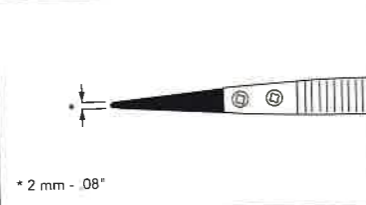

\* 2 mm - .08"




**1603-AL** 115 mm - 4 1/2"  
Black ESD Safe  
**1603-AL-STD** 115 mm - 4 1/2"  
Grey Static Dissipative  
**1703-AL** 115 mm - 4 1/2"  
White DELRIN 500  
• Strong Flat Tip

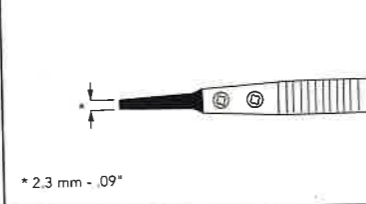

\* 2.3 mm - .09"




**1604-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1604-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1704-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Fine Tip

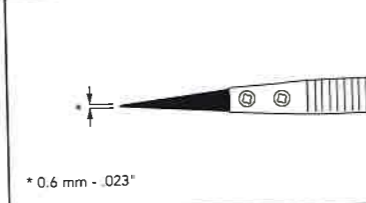

\* 0.6 mm - .023"




**1604B-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1604B-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1704B-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Curved Fine Tip

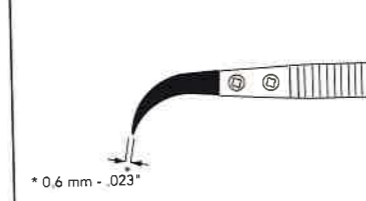

\* 0.6 mm - .023"



**1606-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1606-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1706-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Strong Angulated SMD Flat Tip

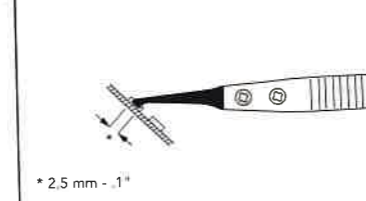

\* 2.5 mm - .1"




**QUICK CHANGE TWEEZERS** - 1600-AL / 1600-AL-STD / 1700-AL series  
Aluminum Serrated Handle



• Available with Inside Serrated Tip, add suffix "D" (example 1609D-AL)


**1609-AL** 115 mm - 4 1/2"  
Black ESD Safe  
**1609-AL-STD** 115 mm - 4 1/2"  
Grey Static Dissipative  
**1709-AL** 115 mm - 4 1/2"  
White DELRIN 500  
• Fine Angulated SMD Flat Tip

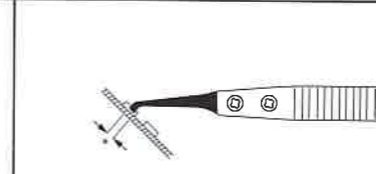

\* 1.5 mm - .06"




**1610A-AL** 115 mm - 4 1/2"  
Black ESD Safe  
**1610A-AL-STD** 115 mm - 4 1/2"  
Grey Static Dissipative  
**1710A-AL** 115 mm - 4 1/2"  
White DELRIN 500  
• Very Small Fine Angulated SMD Flat Tip

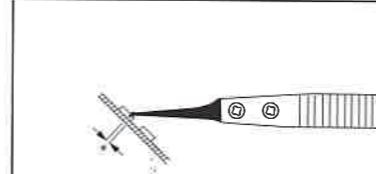

\* 0.6 mm - .023"




**1615-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1615-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1715-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Extra Fine Tip

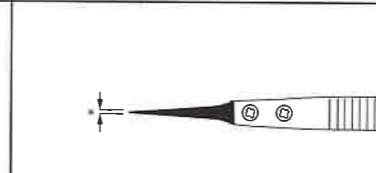

\* 0.3 mm - .011"




**1616-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1616-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1716-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Very Fine Tip

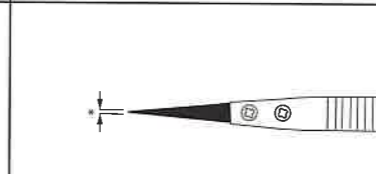

\* 0.5 mm - .019"



**1617-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1617-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1717-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Flat Tip

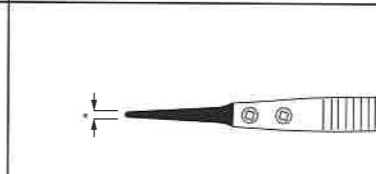

\* 1.5 mm - .06"



**1617B-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1617B-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1717B-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Curved Flat Tip



\* 1.5 mm - .06"




**1618-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1618-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1718-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• For Handling and Positioning Quad Packs and Flat Parts



groove Ø 1 mm - .04"



**1624-AL** 120 mm - 4 3/4"  
Black ESD Safe  
**1624-AL-STD** 120 mm - 4 3/4"  
Grey Static Dissipative  
**1724-AL** 120 mm - 4 3/4"  
White DELRIN 500  
• Very Fine Angulated Flat Tip

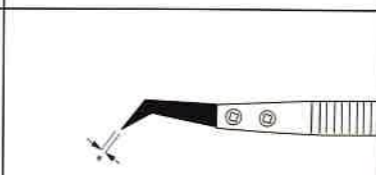

\* 0.5 mm - .019"

